
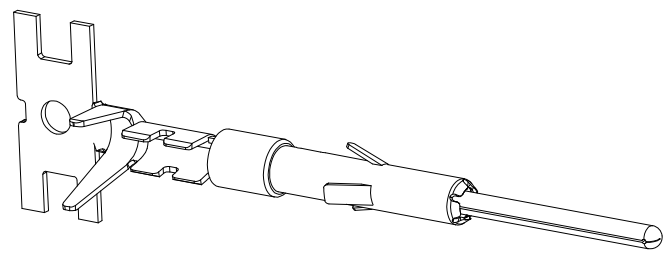




THIS DRAWING IS SUPPLIED FOR INFORMATION ONLY. DESIGN FEATURES, SPECIFICATIONS AND PERFORMANCE DATA SHOWN HEREON ARE THE PROPERTY OF THE AMPHENOL CORPORATION. NO RIGHTS OF REPRODUCTION ARE IMPLIED. ALL DIMENSIONS ARE SUBJECT TO NORMAL MANUFACTURING VARIATIONS.

6		7			8	
REVISIONS						
REV	ZONE	ECD	DESCRIPTION	DATE	BY	APPR
A	--	--	INITIAL RELEASE	11/22/18	FL	JL

Customer Drawing

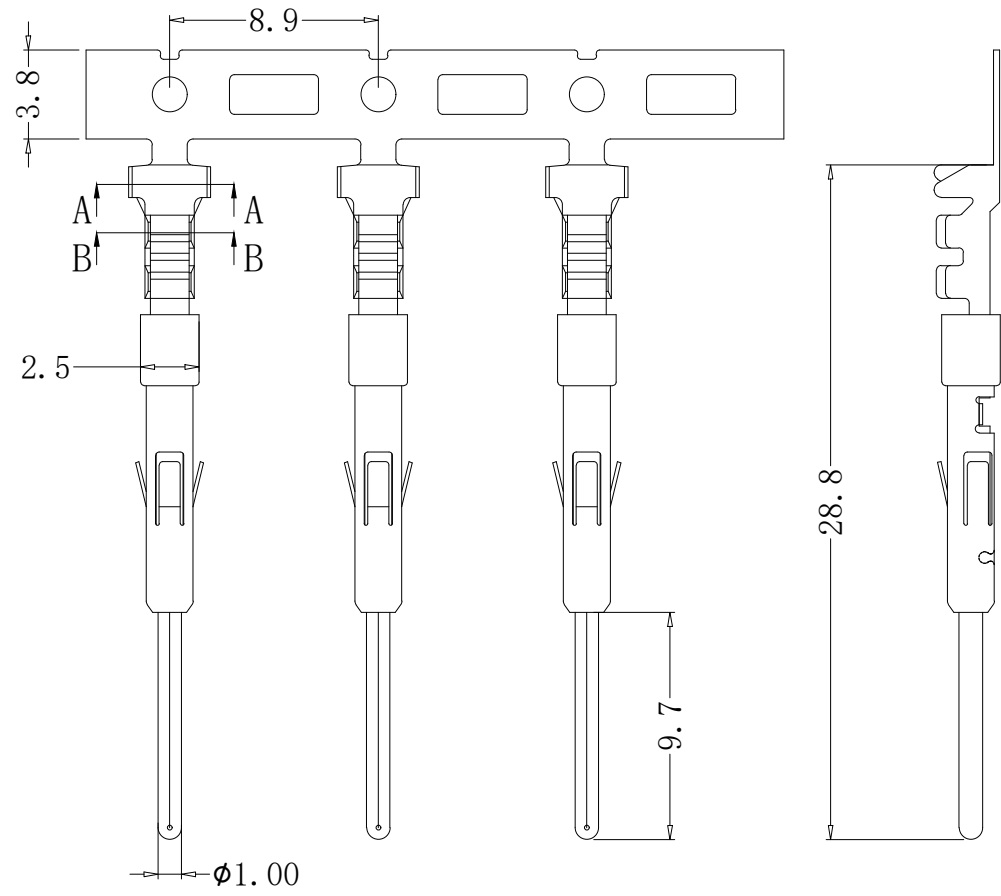

- 注(NOTES):
1. 对配母端直径 Suitable Socket diameter:1.0mm
  2. 额定电流 Current rating: 5A
  3. 端子类型 Terminatin type: Crimp
  4. 压线规格: AWC20~22
  5. 电镀信息 Plating specification: See below
    - 5.1. 当 XX=01 镍底, 整个端子飘金.  
When XX=01 Gold flash plate overall.
    - 5.2. 当 XX=02 镍底, 接触位置镀金10u"  
When XX=02 Contact plating 10u"
    - 5.3. 当 XX=03 镍底, 接触位置镀金30u"  
When XX=03 Contact plating 30u"
    - 5.4. 当 XX=04 镍底镀锡  
When XX=04 Tin over nickel
  6. 材料规格 Material specification:
    - 6.1. 端子: 铜合金  
Contact body: Copper alloy
    - 6.2. 外套: 不锈钢  
Oter spring: Stainless steel
  7. 符合ROHS  
ROHS compliance





		Amphenol Technical Products International GZ				PART NAME: HC Contact 20#Pin AWC20~22	
		第三角投影 THIRD ANGLE PROJECTION	页面 SHEET	幅面 SIZE	版次 REV.	比例 SCALE	DWG NO: HCTM121XX
签名 SIGNATURE		日期 DATE	UNLESS OTHERWISE SPECIFIED			CUST PART #: N/A	
制图 DRAWN	FL	11/22/18	1) All dimensions are in metric(mm). 2) Tolerances are as follows:			CUST REV. -	
审核 CHECKED	YM	11/22/18	0 PL DEC ± 1.00 1 PL DEC ± 0.50 2 PL DEC ± 0.20				
批准 APPROVAL	JL	11/22/18	Angles ±1°				

THIS DRAWING IS SUPPLIED FOR INFORMATION ONLY. DESIGN FEATURES, SPECIFICATIONS AND PERFORMANCE DATA SHOWN HEREON ARE THE PROPERTY OF THE AMPHENOL CORPORATION. NO RIGHTS OF REPRODUCTION ARE IMPLIED. ALL DIMENSIONS ARE SUBJECT TO NORMAL MANUFACTURING VARIATIONS.



Customer Drawing

**Amphenol TPI**  
**2019-01-04**  
**REGISTERED COPY**

REV		ZONE	ECO	DESCRIPTION	DATE	BY	APPR
A		--	--	INITIAL RELEASE	11/22/18	FL	JL

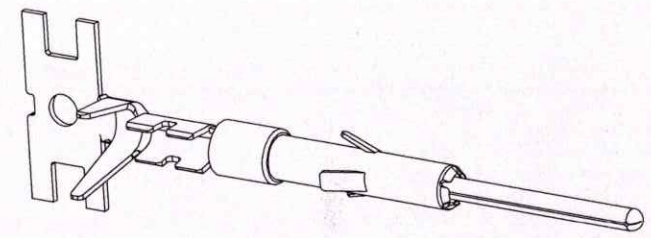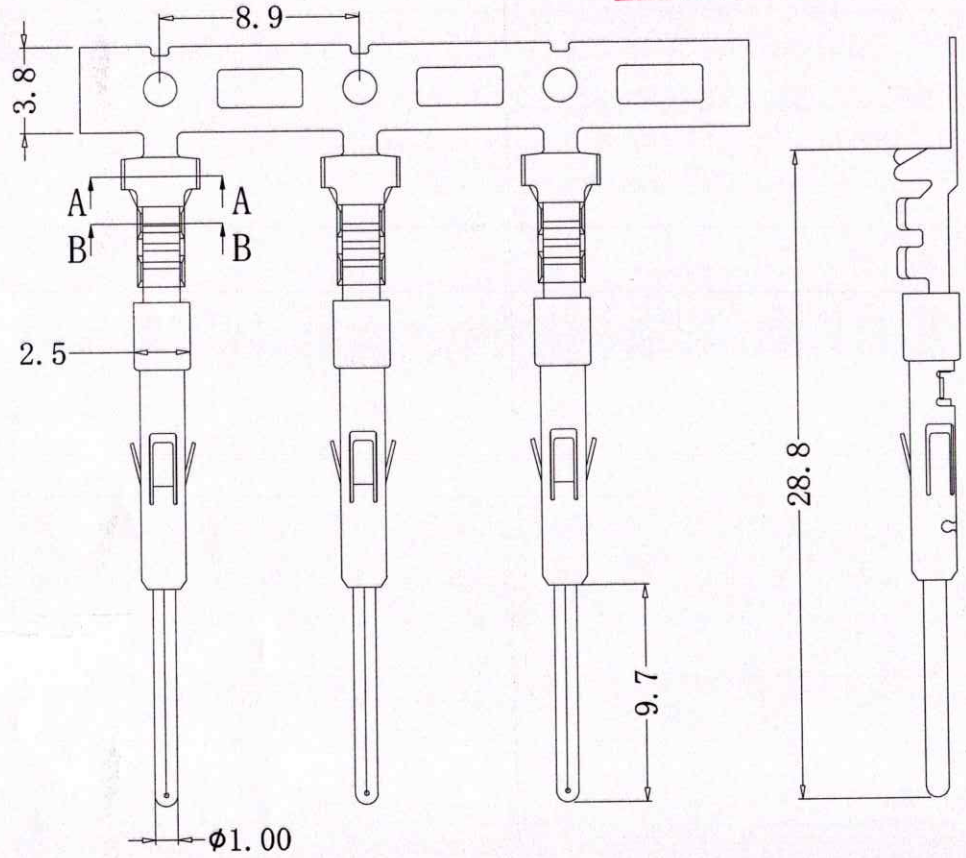

- 注(NOTES):
1. 对配母端直径 Suitable Socket diameter: 1.0mm
  2. 额定电流 Current rating: 5A
  3. 端子类型 Terminatin type: Crimp
  4. 压线规格: AWG20~22
  5. 电镀信息 Plating specification: See below
    - 5.1. 当 XX=01 镍底, 整个端子镀金.  
When XX=01 Gold flash plate overall.
    - 5.2. 当 XX=02 镍底, 接触位置镀金10u"  
When XX=02 Contact plating 10u"
    - 5.3. 当 XX=03 镍底, 接触位置镀金30u"  
When XX=03 Contact plating 30u"
    - 5.4. 当 XX=04 镍底镀锡  
When XX=04 Tin over nickel
  6. 材料规格 Material specification:
    - 6.1. 端子: 铜合金  
Contact body: Copper alloy
    - 6.2. 外套: 不锈钢  
Oter spring: Stainless steel
  7. 符合ROHS  
ROHS compliance



<b>AMPHENOL</b> <b>TPI</b>		<b>Amphenol Technical Products International GZ</b>					
第三角投影 THIRD ANGLE PROJECTION		页面 SHEET	幅面 SIZE	版次 REV.	比例 SCALE	PART NAME: HC Contact 20#Pin AWG20~22	
1 of 1		A3	A				
签名 SIGNATURE		日期 DATE		UNLESS OTHERWISE SPECIFIED			
制图 DRAWN		11/22/18		1) All dimensions are in metric(mm).			
审核 CHECKED		11/22/18		2) Tolerances are as follows:			
批准 APPROVAL		11/22/18		0 PL DEC ± 1.00			
				1 PL DEC ± 0.50			
				2 PL DEC ± 0.20			
				Angles ±1°			
						DWG NO: HCTM121XX	CUST REV. -
						CUST PART #: N/A	

2018.11.30